



Application

- Repair and maintenance

Approvals

- Volkswagen Group

Maestro 2.55

Electro-mechanical 2-post lift, 5.5 t capacity

Description:

Posts:

- Asymmetric post installation
- Very stable bent posts
- Without base frame
- Two motors
- Cold-rolled spindle
- Nylon nut sets
- Carriage with 6 guiding wheels and lubrication-free roller bearings
- Pushbutton control unit with alarm signal
- Programmable top stop
- Electronic synchronization

Arms:


- 4 double telescopic arms
- Internal arm locking system
- Low minimum height

Standard colours

- Arms: Red RAL 3020
- Posts: Grey RAL 7016

Technical data	
Lifting capacity	5,500 kg
Lifting height	1,900 mm
Working height	2,040 - 2,070 mm
Lifting / lowering time	app. 55 Sec.
Motor	2 x 2.8 kw
Voltage	3 x 230/400V - 50 Hz - 35/25 A

Arm superstructure	
Lifting pad included in the delivery	770505 (30 - 60 mm)
Min. height	140 mm
Drive-through width	2,800 - 3,000 mm
Width between posts	3,185 - 3,385 mm
Total width - outer edges posts	3,560 - 3,760 mm
Total width - outer edges base plates	3,910 - 4,110 mm
Total height post	2,908 mm
Total height inkl. portal	4,910 - 5,270 mm
Arm length front, min. - max.	957 - 1,900 mm
Arm length rear, min. - max.	957 - 1,900 mm

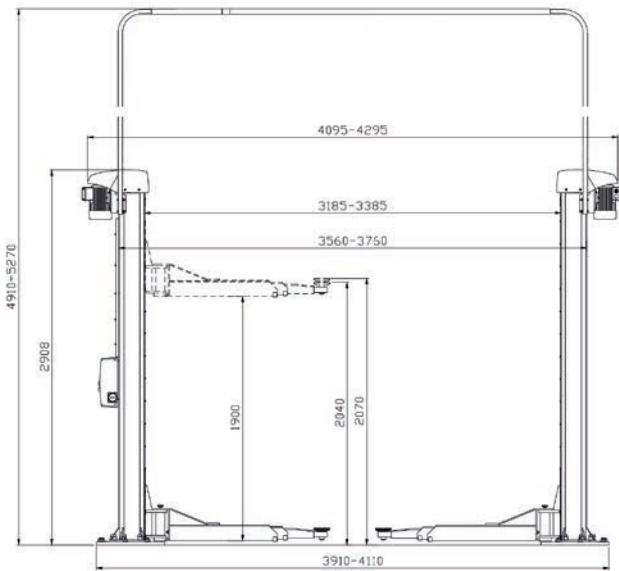

autop Maschinenbau GmbH
 Sandkampstraße 90
 48432 Rheine | Germany
 ☎ +49 5971 8602-02
 📠 +49 5971 8602-25
 ✉ info@autopstenhoj.com

STENHOJ A/S
 Barrit Langgade 188-190
 7150 Barrit | Denmark
 ☎ +45 76821-330
 📠 +45 76821-331
 ✉ info@autopstenhoj.com

Versions:

- Available with different Voltage

Installation:

- F = flex pad

Optional extras:

- Available with portal or in-ground kit
- LED-Lighting set
- Power pack
- Set of expansion bolts
- Extra control unit
- Long door stops
- Wheel holders
- Large program of extra pads

Special colours available on request!!

