




Application

- Check-in
- Repair and maintenance
- Wheel alignment
- Testing equipment

Approvals

- QL 4.55 F 480:
Rolls-Royce
BMW / Mini
- QL 4.55 F 550:
Renault
Volkswagen Group

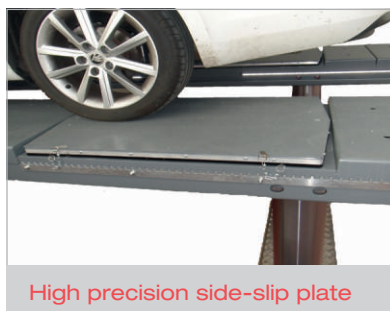

High precision side-slip plate



Recess for turning plate



Specific accessories,
e.g. MKS adaptor

Quattrolift 4.55 F - KA 1550/3000

Electro-hydraulic 4-ram lift, 5.5 t, with platforms

Description:

Steel cassette:

- Waterproof steel cassette

Hydraulic unit:

- 2 separate hydraulic units with hard-chrome plated cylinders
- Electronic synchronization between the hydraulic units and pre-programmed top stop
- Flexible synchronization and safety system
- Corrosion-free guiding elements
- Pump unit with immersed motor
- Ecological hydraulic fluid
- Pneumatic emergency lowering
- Programmable Pushbutton control unit
- Air preparation unit for oil and regulated compressed air (min. 6 bar / max. 10 bar)

Superstructure:

- A set of platforms with drive-on ramps and stops
Platforms with tolerances of only max $\pm 0,5$ mm length- and crosswise
- With two recesses front and rear, as well as distance pieces covering the entire length and fixated by steel edges in sides
- Preparation for innovative air supply for jacking beam


Standard colours

- Platforms: Grey RAL 7016
- Ramps: Red RAL 3020

Technical data	
Lifting capacity	5,500 kg
Lifting height	1,875 mm
Working height	2,070 mm
Cylinder diameter	4 x 140 mm
Distance between cylinders	1,550 / 3,000 mm
Lifting / lowering time	app. 30 Sec.
Foundation depth	2,625 mm
Pump unit	2 x 3.0 kW
Ecological hydraulic fluid	18 l
Voltage	230/400 V - 50 Hz - 16 A

Platforms	
Usable length of platform	F 480: 4,800 mm F 550: 5,500 mm
Wheel base	F 480: 4,150 mm F 550: 4,850 mm
Platform width	650 mm
Distance between platforms	900 mm
Drive-on height	195 mm

Scissor jack (Option)	
Lifting capacity	2,600 Kg
Lifting height	250 mm
Operation	Air-hydraulic
Lift positions	Middle / 790 - 1.460 mm

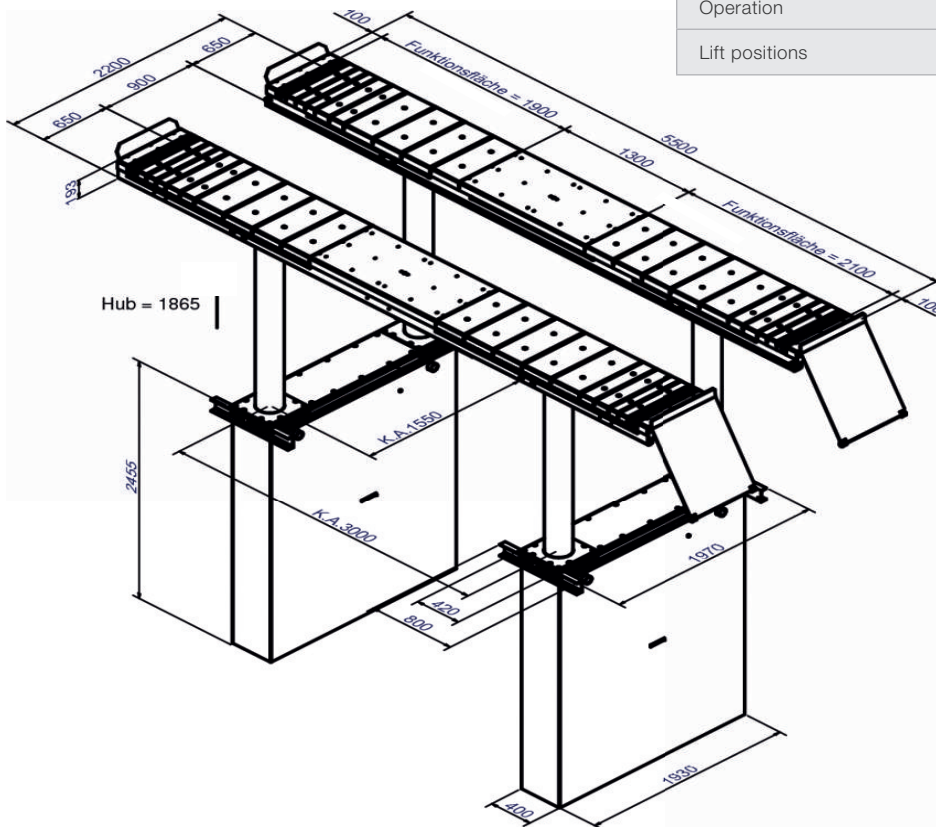

autop Maschinenbau GmbH
 Sandkampstraße 90
 48432 Rheine | Germany
 ☎ +49 5971 8602-02
 📠 +49 5971 8602-25
 ✉ info@autopstenhoj.com

STENHOJ A/S
 Barrit Langgade 188-190
 7150 Barrit | Denmark
 ☎ +45 76821-330
 📠 +45 76821-331
 ✉ info@autopstenhoj.com

Versions:

Steel cassette:

- Zinc-coated
- Coated

Installation:

- Superstructure on floor
- Superstructure in floor

Contact us with regard to the possibilities of combining with other wheel alignment equipment!

Optional extras:

- LED-Lighting set
- Precision slip plates
- Scissor jack

Zink coating and special colours on request!

