

Magnat 40

Electro-hydraulic 2-post lift, 4 t capacity



Application

- Repair and maintenance

Description:

Posts:

- Vehicle rear positioning for optimum door opening angle
- Very stable bent posts
- Without base frame
- One hydraulic unit
- Carriage with slide blocks
- Pushbutton control unit with alarm signal stop and upper protection list
- Mechanic synchronization
- Safety ratchet system no expensive compressed air required
- Post is height adjustable during installation

Arms:

- Double telescopic front and rear arms, as standard
- Possibility of parallel parking of arms
- Automatic arm locking system
- Low minimum height
- Suitable for the smallest passenger cars up to T6 long
- Parallel-parking of arms eases positioning

Standard colours:

- Arms: RAL 3020 – red
- Posts: RAL 7016 – grey

Versions:

- Available with different voltages
- BMW- and Universal armset available
- FD BMW
- FD Uni

Optional extras:

- Set of expansion bolts
- A large program of lifting pads
- Portal can during installation be fitted in 2 different heights
- Adaptor for AUTOPSTENHOJ pads

Special colours available on request!



Scan the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

AUTOPSTENHOJ GmbH


Sandkampstraße 90
D-48432 Rheine
☎ +49 5971 8602-02
✉ info@autopstenhoj.com

AUTOPSTENHOJ GmbH

Barrit Langgade 188-190
DK-7150 Barrit
☎ +45 76 82 13 30
✉ info@autopstenhoj.com

Technical data	
Lifting capacity	4,000 kg
Lifting height	1,800 mm
Working height	1,940 mm
Lifting / lowering time	30 sec.
Pump unit	2.2 kW
Voltage	3x230 / 400 V - 50 / 60Hz - 16 A

Arm superstructure	
Lifting pad included in the delivery	F: 95 – 140 mm
Min. height	95 mm
Drive-through width	Uni: 2,450 mm
Width between posts	Uni: 2,760 mm
Total width - outer edges base plates	Uni: 3,495 mm
Total height incl. portal	4,009 mm + 250 mm
Arm length front, min. - max.	F Uni: 640 – 1,145 mm
Arm length rear, min. - max.	F Uni: 880 – 1,560 mm

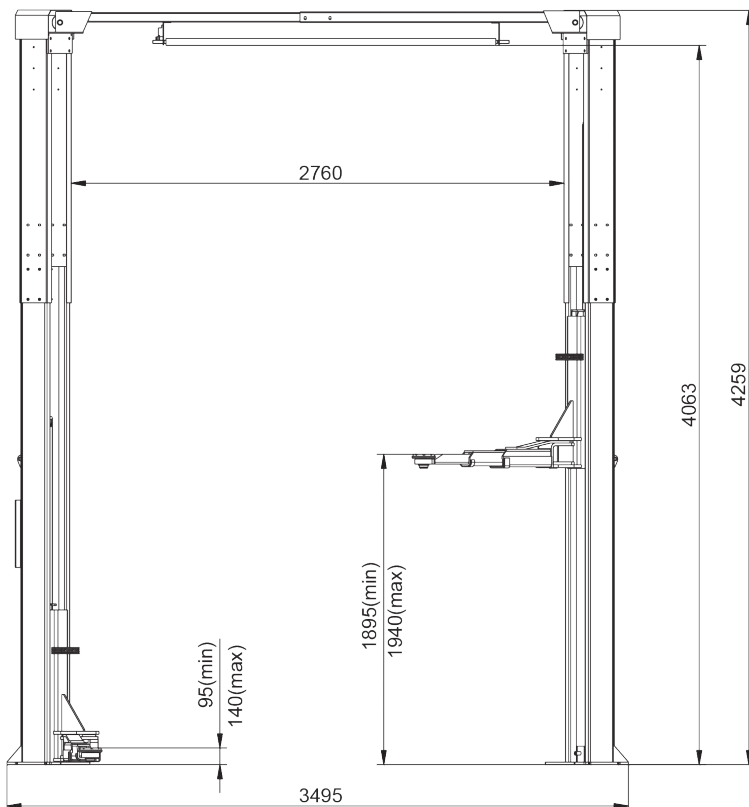

Swivel arm positioning > 180° for better drive-in situation



Low arm construction <100mm



Arm locking system and door protection