



Application ☐ Check-in ☐ Repair and maintenance

Approvals

□ Renault

# **Major 6230**

Electro-hydraulic 4-post lift, 6.2 t capacity

# **Description:**

## Posts:

- ☐ Integrated eccentric brake system
- Emergency stop valve
- □ Obstruction system
- ☐ Pneumatic parking system in height adjustable ratchets
- ☐ Pump and control unit on rear left post
- ☐ Pushbutton control unit with alarm signal
- ☐ Hydraulic cylinder under left platform
- ☐ Lifting and lowering by means of cables☐ Emergency lowering valve

## Superstructure:

- ☐ One movable platform as standard
- □ Platforms prepared for AUTOPSTENHOJ Scissor jack Micro


## Standard colours

- ☐ Platforms & posts: Grey RAL 7016
- □ Ramps: Red RAL 3020



Technical data	
Lifting capacity	6,200 kg
Lifting height	1,670 mm
Working height	1,840 mm
Lifting / lowering time	app. 48/58 Sec.
Pump unit	3.0 kW
Voltage	3x230/400V - 50 Hz - 25/16 A

Platforms	
Total length	6,780/7,280 mm
Usable length of platform	5,500/6,000 mm
Wheel base, min max.	variabel
Platform width	630 mm
Distance between platforms	725 - 1,210 mm
Min. height	170 mm
Width between posts	3,000 mm
Total width - outer edges posts	3,432 mm
Total height	2,235 mm

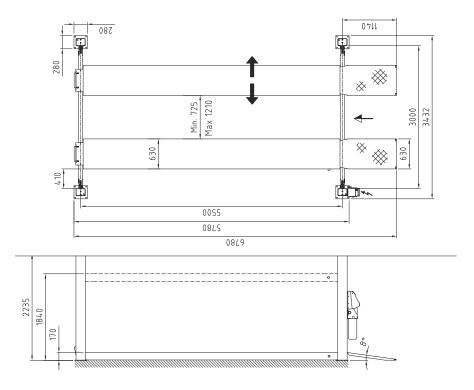

#### autop Maschinenbau GmbH

Sandkampstraße 90 48432 Rheine | Germany

- +49 5971 8602-02
- **+**49 5971 8602-25
- ⊠ info@autopstenhoj.com

#### STENHOJ A/S

Barrit Langgade 188-190 7150 Barrit | Denmark

- **4** +45 76821-330
- **₽** +45 76821-331
- info@autopstenhoj.com

  info@autopstenhoj.com

# Versions:

- ☐ Available with different Voltage
- ☐ Drive-on ramps and stops for surface-mounting, alternatively drive-over ramps for recessed installation

## Installation:

- ☐ S = flush platforms
- ☐ G = galvanized platforms
- □ 55 = 5,500 mm Platforms
- □ 60 = 6,000 mm Platforms

# Optional extras:

- ☐ Set of expansion bolts
- Extra control unitLED-Lighting set
- ☐ Set of two 385 mm ramp extensions
- ☐ Set of two platform extensions (0.5 m)

